

Random nonlinear layered structures as sources of photon pairs for quantum-information processing

JAN PEŘINA JR.¹, MARCO CENTINI², CONCITA SIBILIA² and MARIO BERTOLOTTI²

¹ *Joint Laboratory of Optics of Palacký University and Institute of Physics of Academy of Sciences of the Czech Republic, 17. listopadu 50A, 772 07 Olomouc, Czech Republic*

² *Dipartimento di Energetica, Università La Sapienza di Roma, Via A. Scarpa 16, 00161 Roma, Italy*

PACS 42.50.Dv – Quantum optics-quantum state engineering

PACS 42.50.Ex – Optical implementations of quantum information processing and transfer

PACS 42.25.Dd – Wave propagation in random media

Abstract. - Random nonlinear layered structures have been found to be a useful source of photon pairs with perfectly indistinguishable un-entangled photons emitted into a very narrow spectral range. Localization of the interacting optical fields typical for random structures gives relatively high photon-pair fluxes. Superposing photon-pair emission quantum paths at different emission angles, several kinds of two-photon states (including states with coincident frequencies) useful in quantum-information processing can easily be generated.

Since the pioneering generation of photon pairs by Mandel and coworkers [1] photon pairs have been generated in many nonlinear materials using different configurations and geometries. Their properties are determined by their source. In general photon pairs can be divided into entangled and un-entangled pairs in a given degree of freedom. While entangled photon pairs have been found useful in many physical experiments testing quantum mechanics, demonstrating quantum teleportation, etc., un-entangled photon pairs have been found extraordinarily suitable for almost all quantum-information protocols [2,3]. The reason is perfect indistinguishability of two photons comprising a photon pair that is not 'spoilt' by entanglement and that guarantees perfect visibility in any interferometric setup. Moreover if pulsed pumping generates simultaneously $\mathcal{N}$ photon pairs we have $2\mathcal{N}$ indistinguishable photons localized in a very sharp time window. This is ideal for quantum-information processing.

The first attention to un-entangled photon pairs has been attracted when two-photon states coincident in frequencies [4–6] were studied. It has been shown that nonlinear bulk crystals pumped by a spatially chirped beam [7–9] can serve as a source of such states. Also assuming non-collinear geometry, crystal of a given length and pumping with a suitable waist the theory [10,11] predicts an un-entangled state at the output of a nonlinear crystal. Wave-guiding structures with perpendicular pumping and counter-propagating signal and idler beams ([12,13], [14]

and references therein) also provide un-entangled states but they suffer from low photon-pair generation rates [15]. Here we offer an alternative way of generating photon pairs using random nonlinear layered structures. Easy and fault-tolerant fabrication represents a great advantage of this source of un-entangled photon pairs that is able to deliver sufficient photon fluxes. Moreover its integration into optoelectronic circuits is possible.

Considering the generation of photon pairs at the fiber-optics communication wavelength $1.55\ \mu\text{m}$ we assume layered structures made of LiNbO_3 with etched strips filled by SiO_x and pumping of spontaneous parametric down-conversion at the wavelength around $\lambda_0/2 = 775\ \text{nm}$ using a pulse 250 fs long. We note that production of photon pairs in regular layered structures has been studied in Refs. [16–19] where the details of the used model can be found. Structures under investigation are composed of 300 elementary layers with the mean layer optical thickness equal to $\lambda_0/4$ and material of each elementary layer is randomly chosen. Typical lengths of these structures lie around $60\ \mu\text{m}$. Numerical simulations for the used materials have revealed that suitable numbers of layers are in the interval from 200 to 400. It holds in general that the greater the contrast of indexes of refraction of two materials the smaller the number of needed layers. In order to include fabrication imperfections additional random Gaussian shifts of boundary positions with variance $\lambda_0/40$ are assumed. Nonlinear material LiNbO_3 is oriented

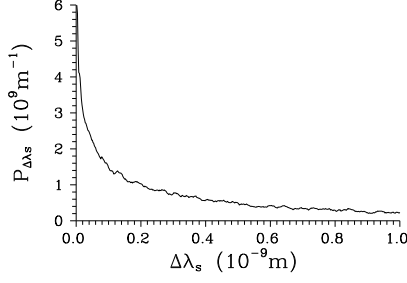


Fig. 1: Probability distribution $P_{\Delta\lambda_s}$ of widths (FWHM) $\Delta\lambda_s$ of intensity transmission peaks in the signal field at central wavelengths near λ_0 ; $\theta_s = \theta_i = 10$ deg.

such that s-polarized signal, idler, and pump fields can efficiently interact. The optical axis of LiNbO₃ is parallel to the planes of boundaries and coincides with the directions of fields' polarizations. We note that similar structures have been investigated from the point of view of second-harmonic generation [20, 21]. The occurrence of strongly spatially localized states with highly enhanced electric-field amplitudes (an optical analog of Anderson localization [22]) is the most striking feature of these structures. Because the shorter the wavelength the larger the localization length, structures with localized signal and idler fields and without localized pump field can be found. In this case, high values of the overlap integral of fields' amplitudes inside the structure can be reached. We note that phase-matching conditions do not play a substantial role here owing to short lengths of layers. Because frequencies of the signal and idler fields depend on a given realization of a random structure the condition for frequency matching can only be fulfilled by an appropriate choice of the pump-field frequency after fabrication of the structure. Spectral widths of the signal and idler photons in a pair are more-less determined by widths of the corresponding transmission peaks and so their values may vary by several orders of magnitude, as documented in fig. 1. This is caused by the fact that nearly identical conditions for the nonlinear process are found for all frequencies inside the narrow signal- and idler-field transmission peaks (provided that the pump-field spectrum is sufficiently wide). The longer the structure the narrower (on average) transmission peaks can be expected. Also the greater the radial emission angle θ of a down-converted field the narrower peaks are found. In a typical sample there occur several transmission peaks at different radial emission angles θ for a given frequency. Also a given transmission peak is observed in a certain interval of emission angles θ and it holds that the greater the radial emission angle θ the greater the central frequencies ω_s^0 and ω_i^0 of the signal and idler fields.

Normally incident pump beam in the form of a plane wave and frequency degenerate signal and idler fields represent the simplest configuration. In this case, signal and idler photons occur at opposite sides of the emission cone. Enhancement of photon-pair generation rate up to three

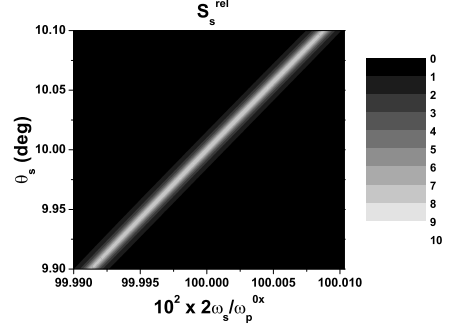


Fig. 2: Contour plot of relative signal-field energy spectrum S_s^{rel} depending on normalized signal-field frequency $2\omega_s/\omega_p^{0x}$ and signal-field radial emission angle θ_s . Spectrum S_s^{rel} is given by the ratio of actual spectrum and that of a reference homogeneous structure containing the same amount of perfectly-phase-matched nonlinear material.

orders of magnitude (for central frequencies) is observed as a consequence of high signal- and idler-field amplitudes occurring in localized states (see fig. 2 where the enhancement one order of magnitude is in agreement with wider signal- and idler-field spectra). However high enhancement of photon-pair generation rates is at the expense of dramatic narrowing of the emission bandwidths and so only from 10 to 10^3 photon pairs per 100 mW of pumping is expected in the whole emission cone. The wider the transmission peak the higher the number of the generated photon pairs. Similar effects can also be observed in second-harmonic generation [21].

A two-photon state $|\psi\rangle_{\theta_s, \theta_i}$ describing a photon pair emitted into the signal- and idler-field radial emission angles θ_s and θ_i can be written as follows:

$$|\psi\rangle_{\theta_s, \theta_i} = \int d\omega_s \int d\omega_i \phi_{\theta_s, \theta_i}(\omega_s, \omega_i) |1\rangle_{\theta_s, \omega_s} |1\rangle_{\theta_i, \omega_i}, \quad (1)$$

where the Fock state $|1\rangle_{\theta_j, \omega_j}$ contains one photon at frequency ω_j in the form of a plane wave propagating along radial angle θ_j ($j = s, i$). Two-photon spectral amplitude $\phi_{\theta_s, \theta_i}(\omega_s, \omega_i)$ gives us a probability amplitude of emitting a signal photon at frequency ω_s and its idler twin at frequency ω_i . Its typical shape with contour plot resembling a cross (see fig. 3) is found in random layered structures. This shape reflects nearly perfect separability of the two-photon state as can be revealed in the Schmidt decomposition of the two-photon amplitude ϕ . Two photons in a pair are perfectly indistinguishable owing to identical emission conditions. This can be experimentally verified, e.g., in Hong-Ou-Mandel interferometer giving visibility one. Wave-packets with durations in tens or hundreds of ps characterize these states in time domain.

Linear dependence of the signal- and idler-field central frequencies ω_s^0 and ω_i^0 on the radial emission angles θ_s and θ_i of this source of un-entangled photon pairs (see fig. 2)


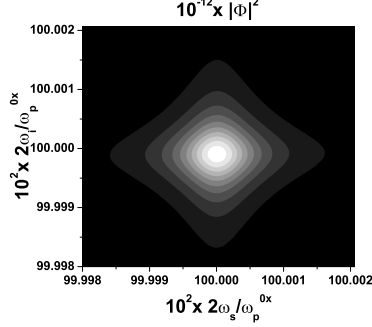


Fig. 3: Contour plot of squared modulus $|\phi|^2$ of the two-photon spectral amplitude at signal-field radial emission angle $\theta_s = 10$ deg; $|\phi|^2$ is normalized such that $4 \int d\omega_s \int d\omega_i |\phi(\omega_s, \omega_i)|^2 / (\omega_p^{0x})^2 = 1$.


allows to create easily new two-photon states by superposing photon pairs emitted into different radial emission angles. The fact that the shapes of two-photon spectral amplitudes ϕ corresponding to different emission angles θ_s (θ_i) are nearly identical is a great advantage and allows to generate well defined two-photon states. Several kinds of two-photon states needed in quantum-information protocols can conveniently be generated this way as the following two examples demonstrate. If two-photon states emitted into a certain interval of radial emission angles θ are superposed (with a suitable phase compensation) two-photon states with coincident frequencies can be reached (see fig. 4a). In this case, the larger the range of the included emission angles, the broader the intensity spectra of the signal and idler fields and the higher the entanglement. Similarly, if two-photon amplitudes propagating from M equidistantly positioned pinholes at increasing emission angles θ_s and θ_i are added two-photon states composed of M independent collective modes (defined by the Schmidt decomposition) are obtained (see fig. 4b).

Random layered structures can also be used for spectrally non-degenerate emission of photon pairs though the generation of a suitable structure is an order of magnitude more difficult compared to the spectrally degenerate case. For example, un-entangled two-photon states with considerably different signal- and idler-field spectral widths can be obtained and then exploited in heralded single-photon sources.

In conclusion, nonlinear random layered structures in which an optical analog of Anderson localization occurs have been discovered as sources of photon pairs containing perfectly indistinguishable photons. Their spectral bandwidths may vary from 0.001 nm up to 1 nm for different realizations of a random structure. Special two-photon states useful in quantum-information processing can easily be generated superposing states occurring at different emission angles.

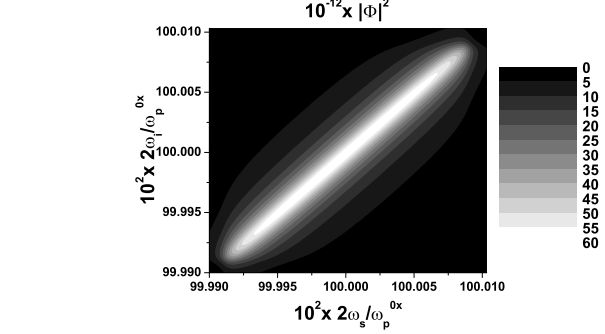

a)

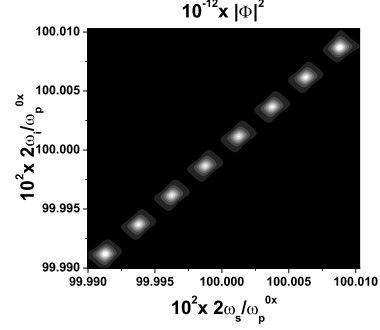

b)

Fig. 4: Contour plot of squared modulus $|\phi|^2$ of the two-photon spectral amplitude obtained after superposing two-photon amplitudes from a) a certain range of radial emission angles and b) eight equidistantly positioned pinholes at increasing radial emission angles; see caption to fig. 3 for the normalization of ϕ .

Support by projects IAA100100713 of GA AV ČR, COST 09026, 1M06002 and MSM6198959213 of the Czech Ministry of Education as well as support coming from co-operation agreement between Palacký University and University La Sapienza in Roma are acknowledged.

REFERENCES

- [1] HONG C. K., OU Z. Y. and MANDEL L., *Phys. Rev. Lett.*, **59** (1987) 2044
- [2] U'REN A. B., BANASZEK K. and WALMSLEY I. A., *Quantum Inf. Comp.*, **3** (2003) 480
- [3] U'REN A. B., SILBERHORN C., BANASZEK K., WALMSLEY I. A., ERDMANN R. K., GRICE W. P. and RAYMER M. G., *Laser Phys.*, **15** (2005) 146
- [4] GIOVANNETTI V., MACCONE L., SHAPIRO J. H. and WONG F. N. C., *Phys. Rev. Lett.*, **88** (2002) 183602
- [5] GIOVANNETTI V., MACCONE L., SHAPIRO J. H. and WONG F. N. C., *Phys. Rev. A*, **66** (2002) 043813
- [6] KUZUCU O., FIORENTINO M., ALBOTA M. A., WONG F. N. C. and KAERTNER F. X., *Phys. Rev. Lett.*, **94** (2005) 083601

- [7] TORRES J. P., MACIA F., CARRASCO S. and TORNER L., *Opt. Lett.*, **30** (2005) 314
- [8] TORRES J. P., MITCHELL M. W. and HENDRYCH M., *Phys. Rev. A*, **71** (2005) 022320
- [9] MOLINA-TERRIZA G., MINADRI S., DEYANOVA Y., OSORIO C. I., HENDRYCH M. and TORRES J. P., *Phys. Rev. A*, **72** (2005) 065802
- [10] GRICE W. P., U'REN A. B. and WALMSLEY I. A., *Phys. Rev. A*, **64** (2001) 063815
- [11] CARRASCO S., NASR M. B., SERGIENKO A. V., SALEH B. E. A., TEICH M. C., TORRES J. P. and TORNER L., *Opt. Lett.*, **31** (2006) 253
- [12] DE ROSSI A. and BERGER V., *Phys. Rev. Lett.*, **88** (2002) 043901
- [13] BOOTH M. C., ATATURE M., DI GIUSEPPE G., SALEH B. E. A., SERGIENKO A. V. and TEICH M. C., *Phys. Rev. A*, **66** (2002) 023815
- [14] PEŘINA JR. J., *Phys. Rev. A*, **77** (2008) 013803
- [15] LANCO L., DUCCI S., LIKFORMAN J.-P., MARCADET X., VAN HOUWELINGEN J. A. W., ZBINDEN H., LEO G. and BERGER V., *Phys. Rev. Lett.*, **97** (2006) 173901
- [16] PEŘINA JR. J., CENTINI M., SIBILIA C., BERTOLOTTI M. and SCALORA M., *Phys. Rev. A*, **73** (2006) 033823
- [17] CENTINI M., PEŘINA JR. J., SCISCIONE L., SIBILIA C., SCALORA M., BLOEMER M. J. and BERTOLOTTI M., *Phys. Rev. A*, **72** (2005) 033806
- [18] VAMIVAKAS A. N., SALEH B. E. A., SERGIENKO A. V. and TEICH M. C., *Phys. Rev. A*, **70** (2004) 043810
- [19] PEŘINA JR. J., CENTINI M., SIBILIA C., BERTOLOTTI M. and SCALORA M., *Phys. Rev. A*, **75** (2007) 013805
- [20] OCHIAI T. and SAKODA K., *Opt. Express*, **13** (2005) 9094
- [21] CENTINI M., FELBACQ D., WIERSMA D. S., SIBILIA C., SCALORA M. and BERTOLOTTI M., *J. Eur. Opt. Soc.*, **1** (2006) 06021
- [22] ANDERSON P. W., *Phys. Rev.*, **109** (1958) 1492